

testa ad angolo - angle head

TA07.PD



caratteristiche/features




peso/weight



rotazione/rotation



prestazioni/performance

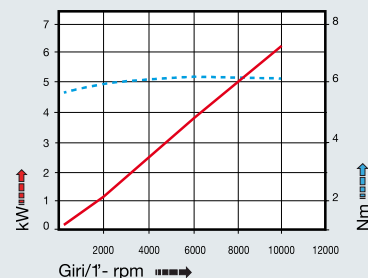

FH
BAH
TA-CP
TA




MOx
HT
VH

TSI/TSX
T

MT-TC-TC3

Accessori
Accessories

Appendice tecnica
Technical supplement

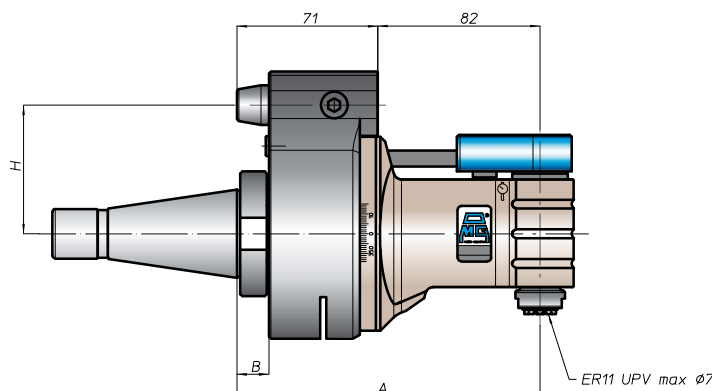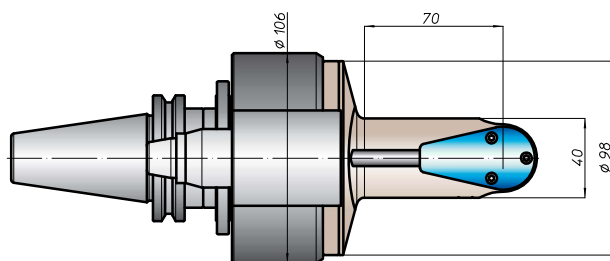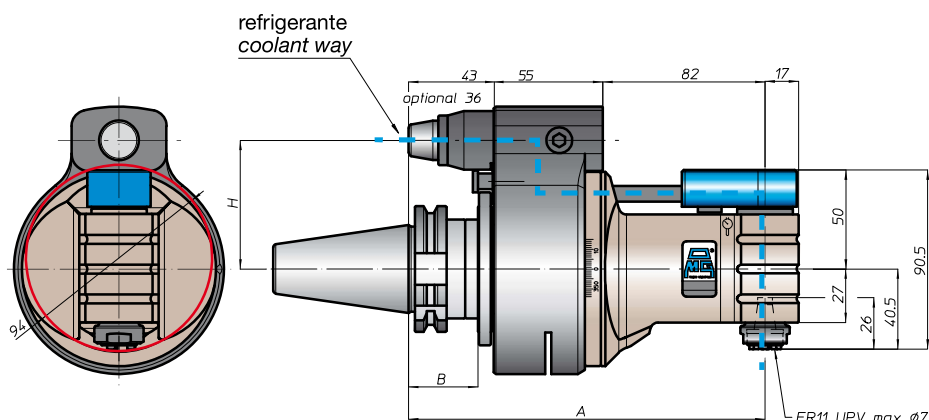

CONO SHANK	size	H		standard	optional
		A	B		
DIN69871 *	30	150	35	65	-
	40			80	110
	45			80	110
	50			80	110
ANSIB5.50 *	40	158	45	65	-
	50			80	110
* BT	40	158	45	65	-
	50			80	110
DIN69893	HSK 63	159	46	65	-
	80			80	110
	100			80	110
ISO26623	C5	154	39	65	-
	C6			80	110
	C8			80	110
KM	63	150	-	65	-
	80			80	110
	100			80	110
DIN2080	-	120	13	65	-
	40			80	110
	-			123	16
ANSIB5.18 NMTB	40	123	16	65	-
	50			80	110

* Option: Dual Contact



TA07.PDL



caratteristiche/features




peso/weight






rotazione/rotation



prestazioni/performance

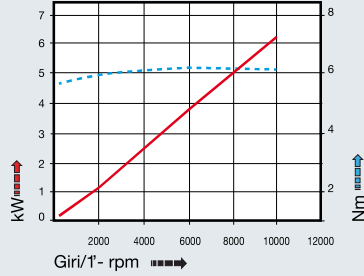

CONO SHANK	size	A	B	H	
				standard	optional
DIN69871 *	40	250	35	65	-
	45			80	110
	50			80	110
ANSIB5.50 *	40	250	35	65	-
	50			80	110
* BT	40	258	45	65	-
	50			80	110
DIN69893	63	259	46	65	-
	80			80	110
	100			80	110
ISO26623	C5	254	39	65	-
	C6			80	110
	C8			80	110
KM	63	250	46	65	-
	80			80	110
	100			80	110
DIN2080	40	220	13	65	-
	50			80	110
	50			80	110
ANSIB5.18	40	220	13	65	-
	50			80	110

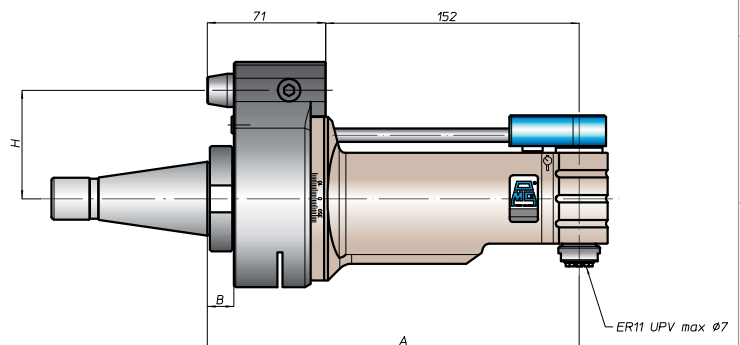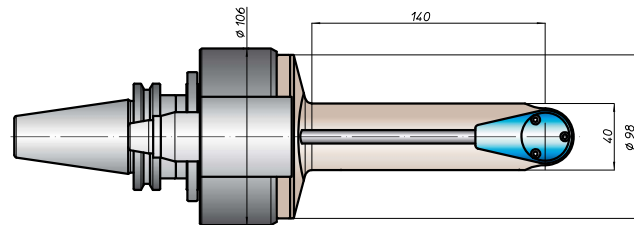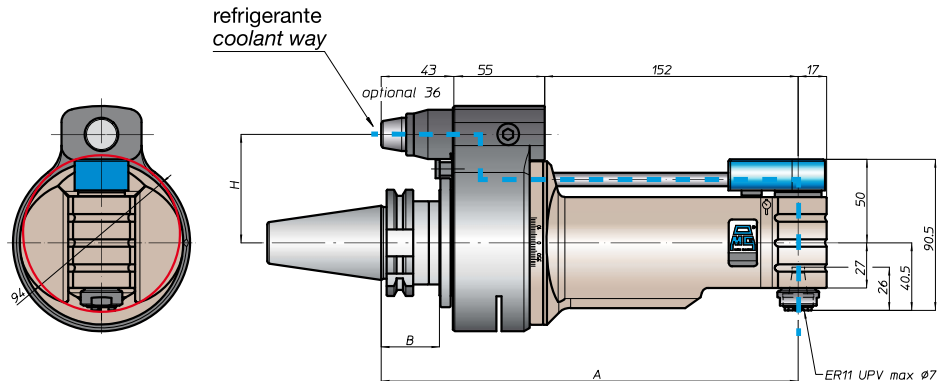

* Option: Dual Contact

FH

BAH

TA-CP

TA

MOx

HT

VH

TSI/TSX

T

MT-TC-TC3

Accessori
AccessoriesAppendice tecnica
Technical supplement

4-50

testa ad angolo - angle head

TA10.PD



caratteristiche/features



ø 10 M8 400 N



1-1 10000 10 bar

peso/weight








5,8 kg 8 kg

rotazione/rotation



input output

prestazioni/performance

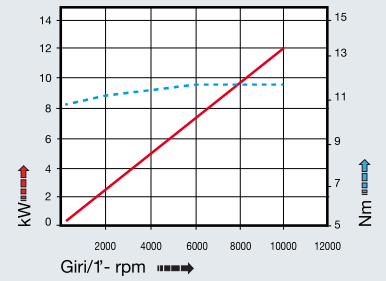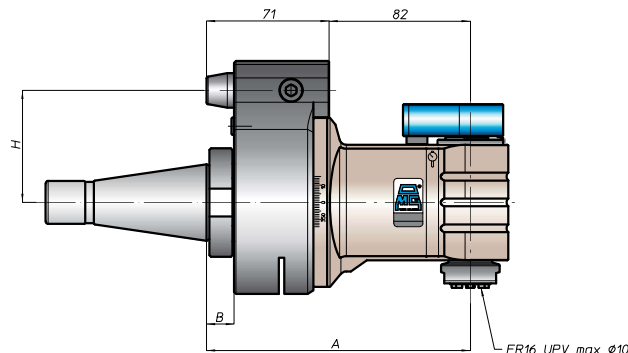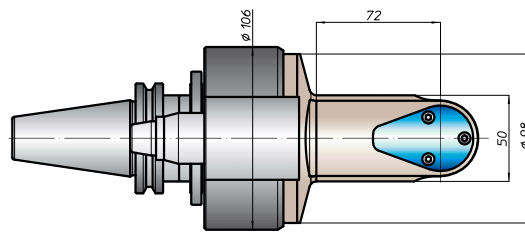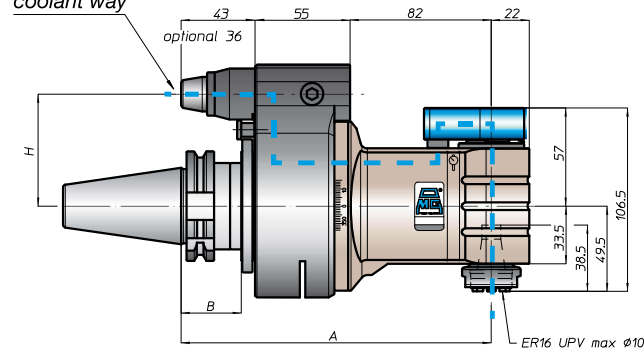refrigerante
coolant way

CONO SHANK	size	H			
		A	B	standard	optional
DIN69871 *	30	180	35	65	-
	40			80	110
	45			80	110
	50			80	110
ANSIB5.50 *	CAT 40			65	-
	50			80	110
*	BT 40			65	
	50	188	45	80	110
DIN69893	HSK 63		44	65	
	80	189		80	110
	100		46	80	110
ISO26623	CAPTO C5			65	
	C6	184	39		
	C8			80	110
KM	63			65	
	80	180		80	110
	100			80	110
DIN2080	-	150	13	65	-
	40				
	-	153	16	80	110
ANSIB5.18	NMTB 40	150	13	65	-
	50	153	16	80	110

* Option: Dual Contact



TA10.PDL




caratteristiche/features

\varnothing 10 M8 400 N
 1-1 10000 10 bar




peso/weight

7,7 kg 10 kg
 rotazione/rotation
 input output

prestazioni/performance

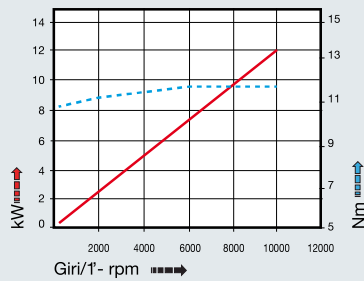

CONO SHANK	size	A	B	H	
				standard	optional
DIN69871 *	40	250	35	65	-
	45			80	110
	50			80	110
ANSIB5.50 *	40	250	35	65	-
	50			80	110
BT *	40	258	45	65	-
	50			80	110
DIN69893	63	259	46	65	-
	80			80	110
	100			80	110
ISO26623	C5	284	39	65	-
	C6			80	110
	C8			80	110
KM	63	250	46	65	-
	80			80	110
	100			80	110
DIN2080	40	220	13	65	-
	50			80	110
	50			80	110
ANSIB5.18	40	220	13	65	-
	50			80	110

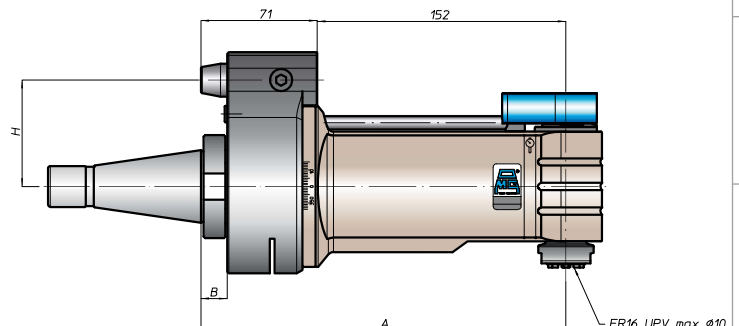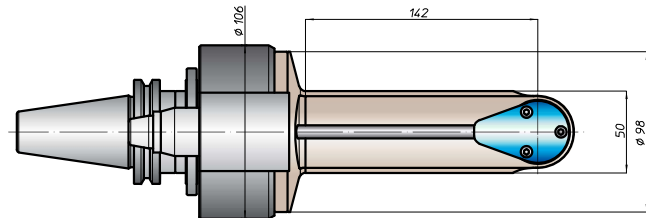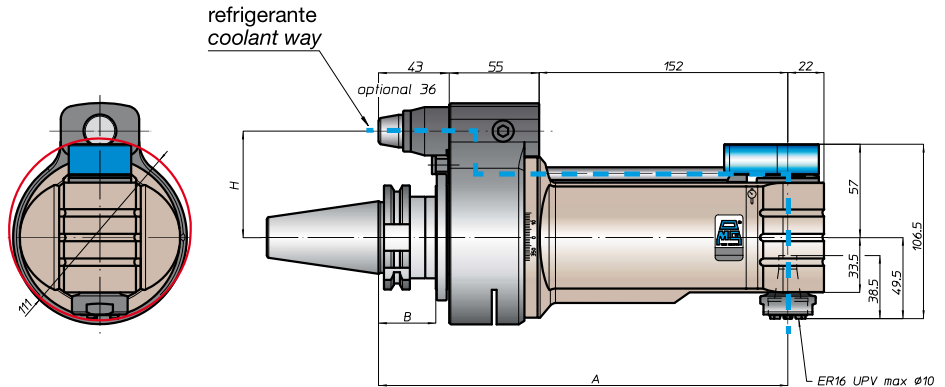

* Option: Dual Contact

FH
BAH
TA-CP
TA

MOX

HT

VH

TSI/TSX

T

MT-TC-TC3

Accessori
Accessories

Appendice tecnica
Technical supplement

TA13.PD



caratteristiche/features








peso/weight



rotazione/rotation



prestazioni/performance

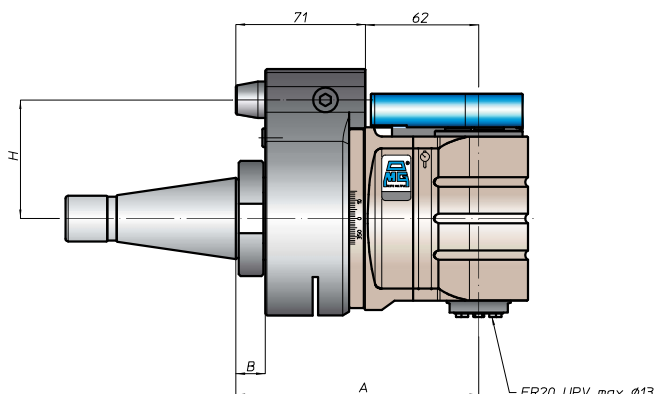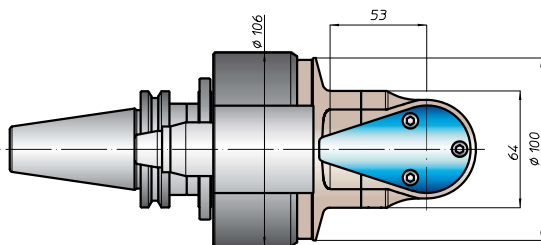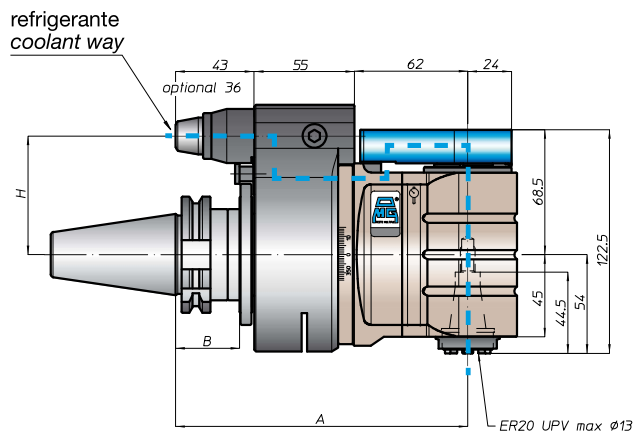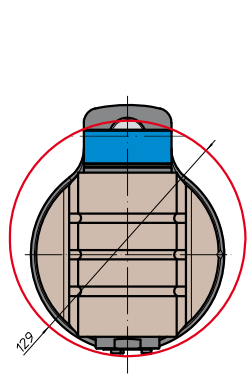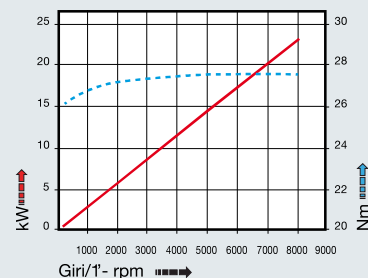

CONO SHANK	size	H			
		A	B	standard	optional
DIN69871 *	40	160	35	65	-
	45			80	110
	50			80	110
ANSIB5.50 *	40	160	35	65	-
	50			80	110
* BT	40	168	45	65	-
	50			80	110
DIN69893	63	169	46	65	-
	80			80	110
	100			80	110
ISO26623	C5	164	39	65	-
	C6			80	110
	C8			80	110
KM	63	160	35	65	-
	80			80	110
	100			80	110
DIN2080	40	130	13	65	-
	50			80	110
	50			80	110
ANSIB5.18 NMTB	40	130	13	65	-
	50			80	110

* Option: Dual Contact

TA

TA-CP

BAH

FH

MOx

HT

VH

TSI/TSX

T

MT-TC-TC3

Accessori
Accessories

Appendice tecnica
Technical supplement



TA16.PD



caratteristiche/features



peso/weight




7,7 kg 12 kg

rotazione/rotation



input output





prestazioni/performance

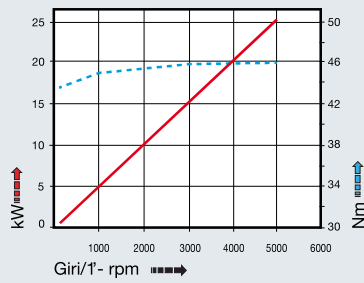

CONO SHANK	size	A	B	H	
				standard	optional
DIN69871 *	-	172	35	65	-
	40	172	35	65	-
	45	177	35	80	110
	50	177	35	80	110
ANSIB5.50 *	CAT	172	35	65	-
	50	177	35	80	110
* BT	40	172	35	65	-
	50	185	45	80	110
DIN69893	HSK	181	44	65	-
	80	186	46	80	110
	100	186	46	80	110
ISO26623	CAPTO	176	39	65	-
	C5	176	39	65	-
	C6	181	39	80	110
KM	63	172	35	65	-
	80	177	35	80	110
	100	177	35	80	110
DIN2080	-	147	13	65	-
	40	147	13	65	-
	50	150	16	80	110
ANSIB5.18	NMTB	142	13	65	-
	40	142	13	65	-
50	150	16	80	110	

tipi mandrino disponibili / available spindle types

1 DIN6499-ER
ER32

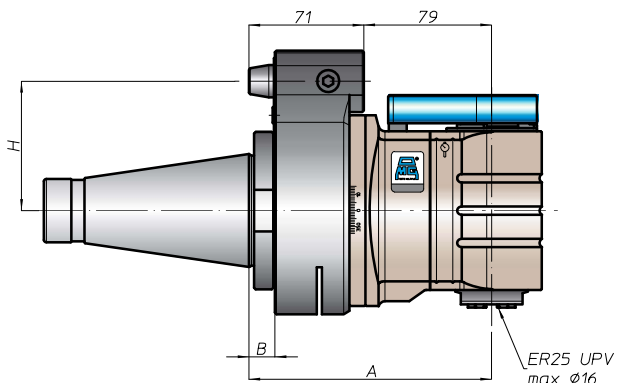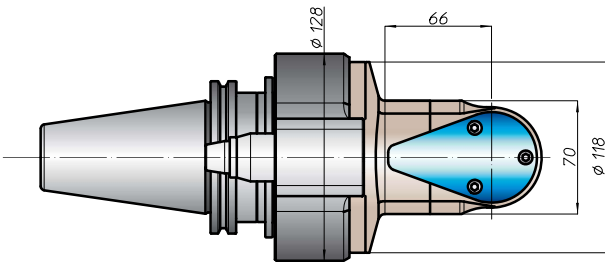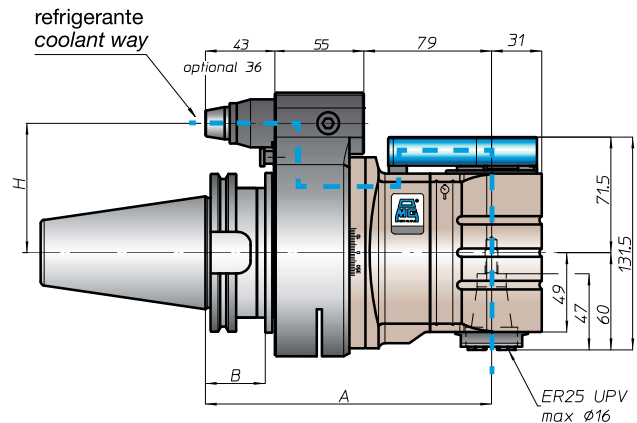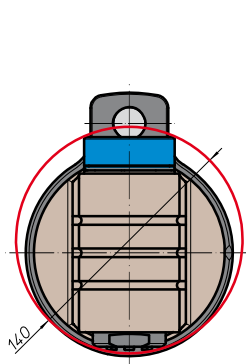

* Option: Dual Contact

FH

BAH

TA-CP

TA

MOX

HT

VH

TSI/TSX

T

MT-TC-TC3

Accessori Accessories

Appendice tecnica Technical supplement

TA20.PD



caratteristiche/features




peso/weight



rotazione/rotation



prestazioni/performance

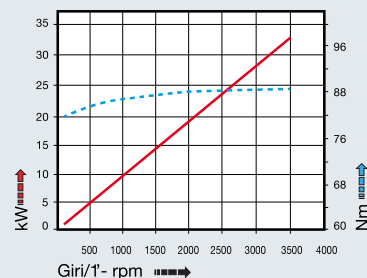

FH
BAH
TA-CP
TA

MOx

HT

VH





TSI/TSX

T

MT-TC-TC3

Accessori
Accessories

Appendice tecnica
Technical supplement

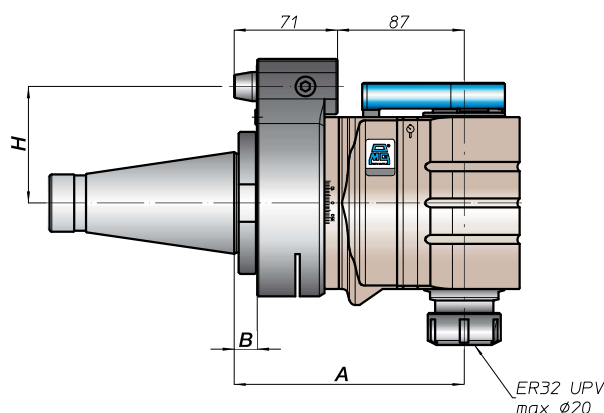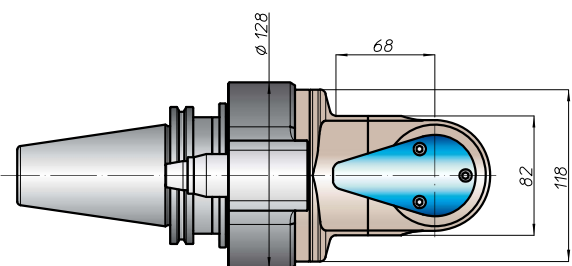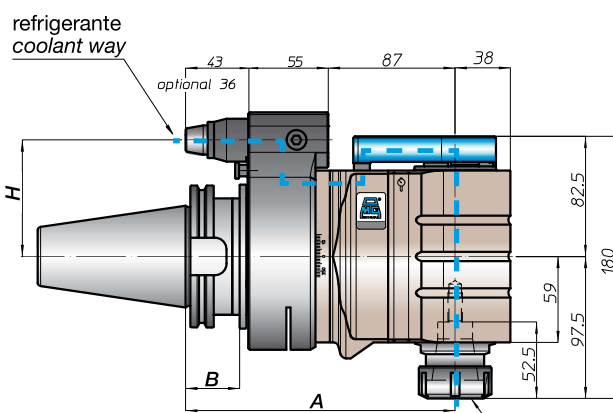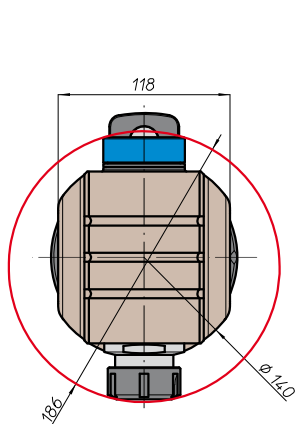

CONO SHANK	size	H			
		A	B	standard	optional
DIN69871 *	-	185	35	-	-
	45			80	110
	50			80	110
ANSIB5.50 *	-	185	35	-	-
	50			80	110
* BT	-	193	45	-	-
	50			80	110
HSK	-	194	46	-	-
	80			80	110
	100			80	110
ISO26623	-	189	-	-	-
	-			80	110
	C8			80	110
KM	-	185	-	-	-
	80			80	110
	100			80	110
DIN2080	-	158	16	-	-
	-			80	110
	50			80	110
ANSIB5.18 NMTB	-	158	16	-	-
	50			80	110

* Option: Dual Contact



TA26.PD



caratteristiche/features

$\varnothing 26$ M20 3020 N
 1-1 2500 10 bar


peso/weight

22 kg





rotazione/rotation

input output

prestazioni/performance

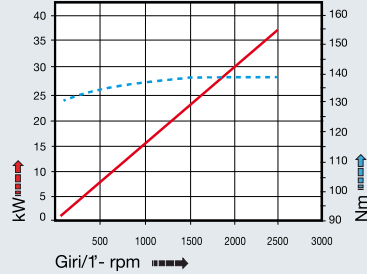

CONO SHANK	size	A	B	H	
				standard	optional
★ DIN69871	-	192	35	-	-
	45			110	-
★ ANSIB5.50	-	192	35	-	-
	50			110	-
★ BT	-	200	45	-	-
	50			110	-
DIN69893	HSK	-	-	-	-
	80	201	46	110	-
ISO26623	CAPTO	-	-	-	-
	100	196	-	110	-
KM	-	192	-	-	-
	100			110	-
DIN2080	-	165	16	-	-
	50			110	-
ANSIB5.18	NMTB	-	-	-	-
	50	165	16	110	-

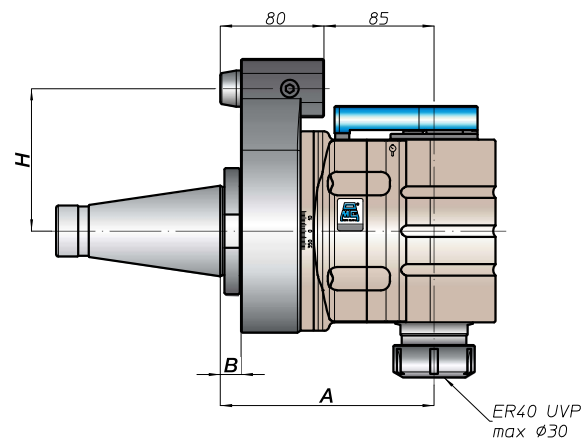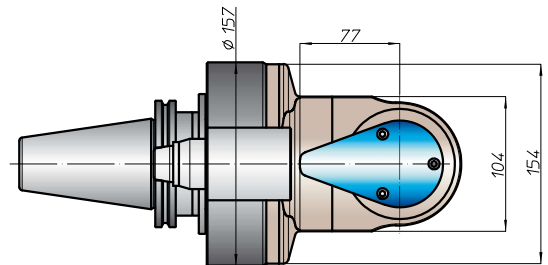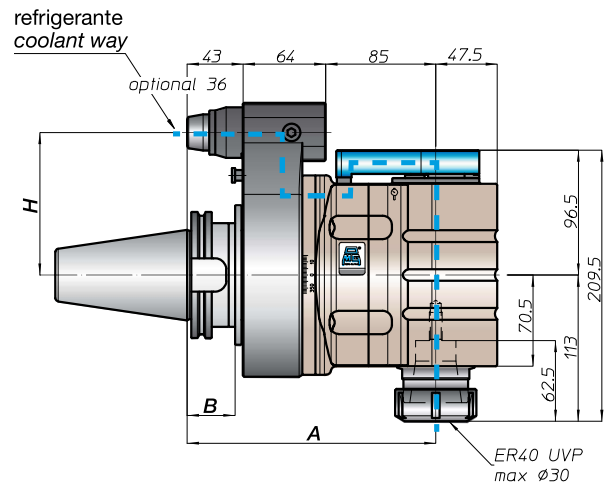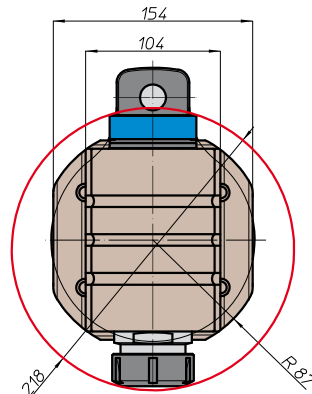

★ Option: Dual Contact

FH

BAH

TA-CP

TA

MOX

HT

VH

TSI/TSX

T

MT-TC-TC3

Accessori
Accessories

Appendice tecnica
Technical supplement

FH

BAH

TA-CP

TA

MOX

HT

VH

TSI/TSX

T

MT-TC-TC3

Accessori
AccessoriesAppendice tecnica
Technical supplement

4-56

testa ad angolo - angle head

TA26.40.D



caratteristiche/features








peso/weight



rotazione/rotation



prestazioni/performance

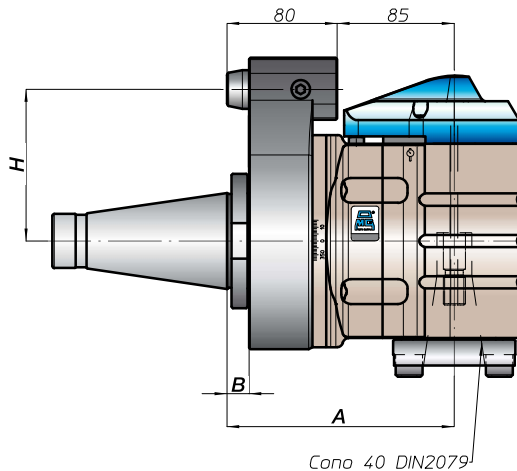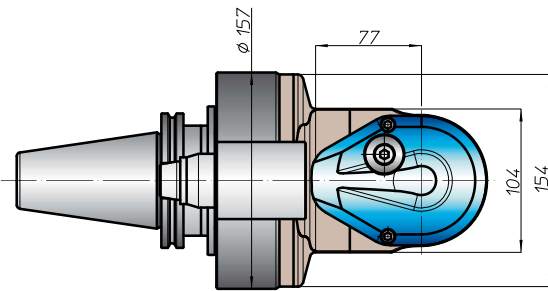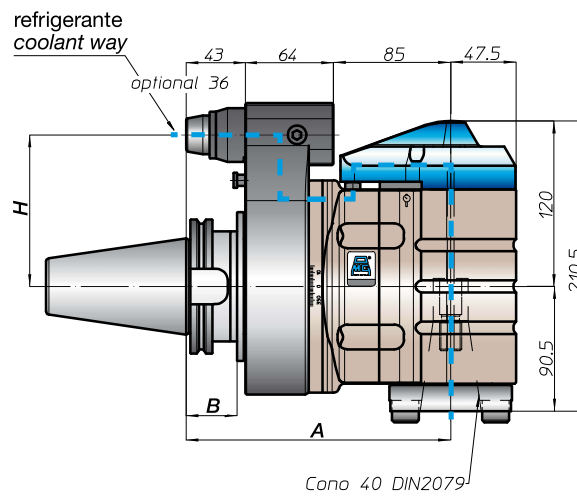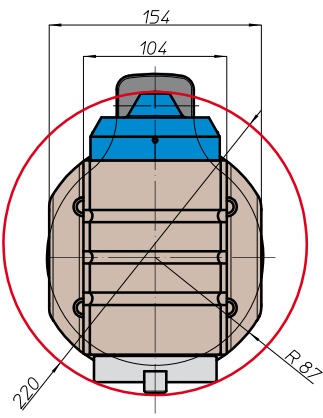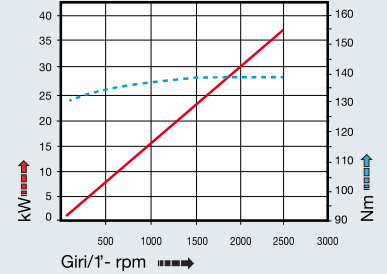

CONO SHANK	size	A	B	H	
				standard	optional
DIN69871 *	-	192	35	-	-
	45			110	-
ANSIB5.50 *	-	196	16	110	-
	50			-	-
* BT	-	200	45	110	-
	50			-	-
DIN69893	HSK	-	-	-	-
	80	201	46	110	-
ISO26623	-	196	16	110	-
	C8			-	-
KM	-	192	16	110	-
	100			-	-
DIN2080	-	165	16	110	-
	50			-	-
ANSIB5.18 NMTB	-	165	16	110	-
	50			-	-

* Option: Dual Contact



FH

BAH

TA-CP

TA

MOx

HT

VH

TSI/TSX

T

MT-TC-TC3

Accessori
Accessories

Appendice tecnica
Technical supplement

