



# TAO10.P



caratteristiche/features

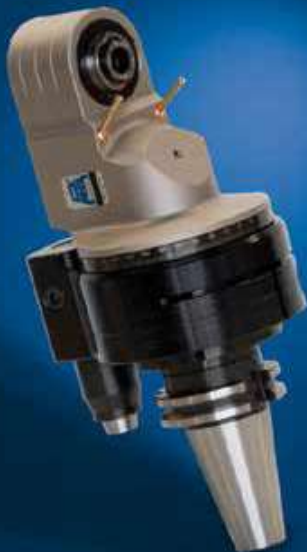


peso/weight



rotazione/rotation






prestazioni/performance

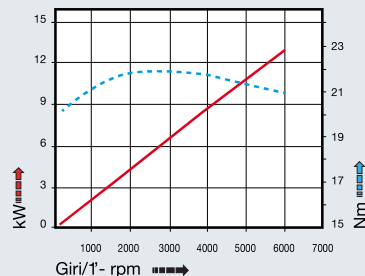

tipi mandrino disponibili / available spindle types

- 2** Albero portafresa  
Milling shaft  
**Ø16**
- 4** DIN69893-HSK  
**HSK25**

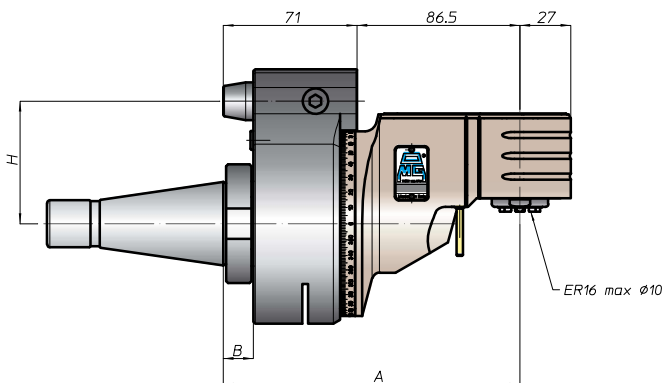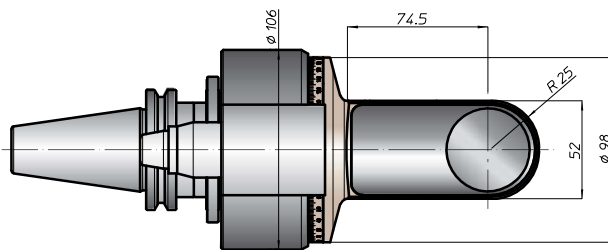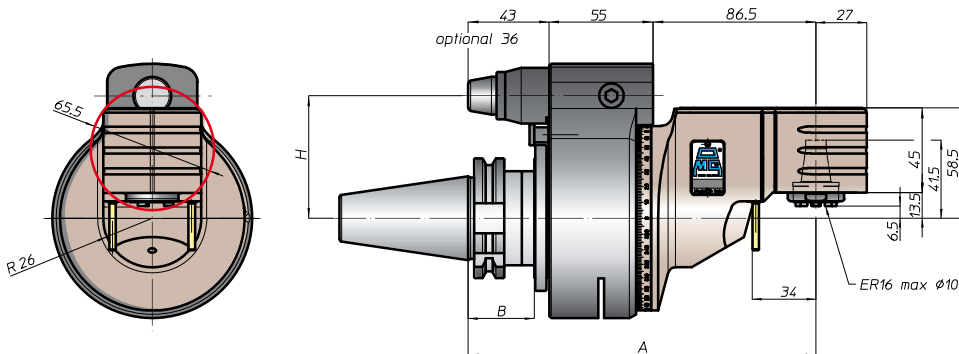

CONO SHANK	size	H			
		A	B	standard	optional
DIN69871 *	-	184,5	35	65	-
	40			80	110
	45			80	110
ANSIB5.50 *	40	184,5	35	65	-
	50			80	110
* BT	40	184,5	35	65	-
	50			80	110
HSK	63	193,5	46	65	-
	80			80	110
	100			80	110
DIN69893	63	188,5	39	65	-
	80			80	110
	100			80	110
CAPTO	C5	188,5	39	65	-
	C6			80	110
	C8			80	110
KM	63	184,5	35	65	-
	80			80	110
	100			80	110
DIN2080	-	157,5	13	65	-
	40			80	110
	50			80	110
ANSIB5.18 NMTB	40	157,5	13	65	-
	50			80	110

\* Option: Dual Contact

TA

TA-CP

BAH

FH

MOX

HT

VH

TSI/TSX

T

MT-TC-TC3

Accessori  
Accessories

Appendice tecnica  
Technical supplement




# TAO13.P



caratteristiche/features




peso/weight



rotazione/rotation






prestazioni/performance

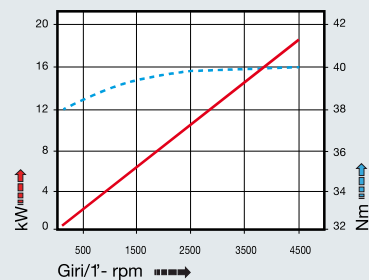

tipi mandrino disponibili / available spindle types

- 2** Albero portafrese  
Milling shaft  
**Ø16**
- 3** Weldon  
Whistle-Notch  
**Ø12**
- 4** DIN69893-HSK  
**HSK32**

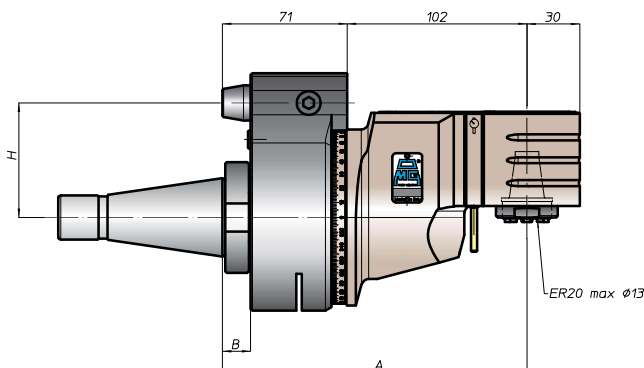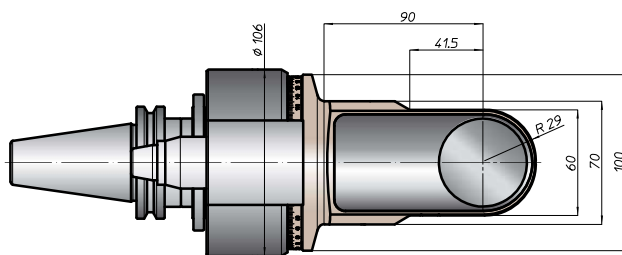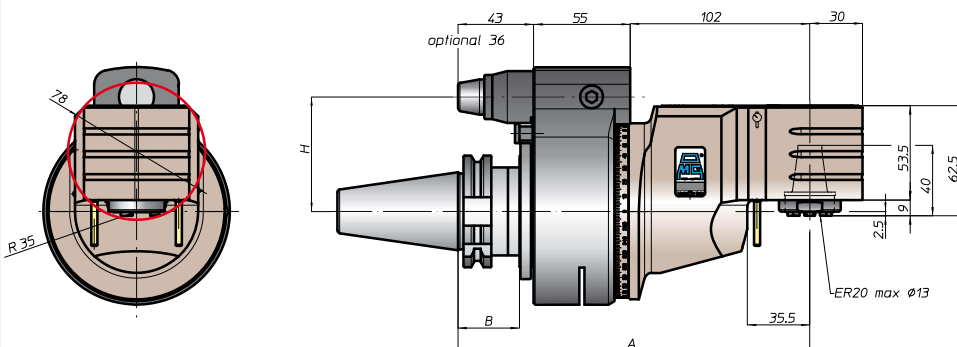

CONO SHANK	size	H			
		A	B	standard	optional
DIN69871 *	-	200	35	65	-
	40			80	110
	45			80	110
ANSIB5.50 *	40	208	45	65	-
	50			80	110
* BT	40	208	45	65	-
	50			80	110
HSK	63	209	46	65	-
	80			80	110
	100			80	110
DIN69893	63	204	39	65	-
	80			80	110
	100			80	110
CAPTO	C5	200	13	65	-
	C6			80	110
	C8			80	110
ISO26623	63	170	13	65	-
	80			80	110
	100			80	110
KM	-	176	16	65	-
	40			80	110
	50			80	110
DIN2080	40	173	13	65	-
	50			80	110
ANSIB5.18 NMTB	40	176	16	80	110
	50			80	110

\* Option: Dual Contact

TA

TA-CP

BAH

FH

MOX

HT

VH

TSI/TSX

T

MT-TC-TC3

Accessori  
Accessories

Appendice tecnica  
Technical supplement



testa ad angolo - angle head

# TAO16.P



caratteristiche/features




peso/weight



rotazione/rotation







prestazioni/performance

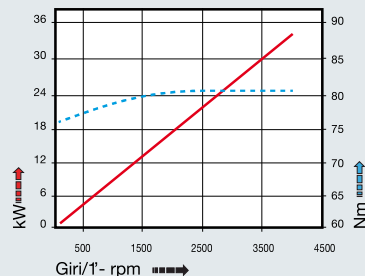

tipi mandrino disponibili / available spindle types

- 2** Albero portafresce / Milling shaft    **3** Weldon / Whistle-Notch    **4** DIN69893-HSK
- Ø16-Ø22-Ø27**    **Ø16**    **HSK40**

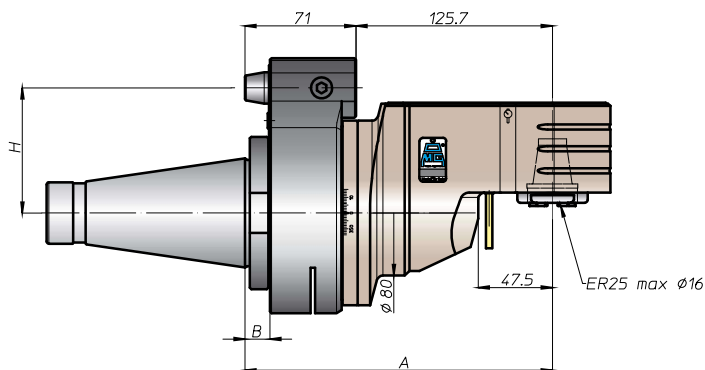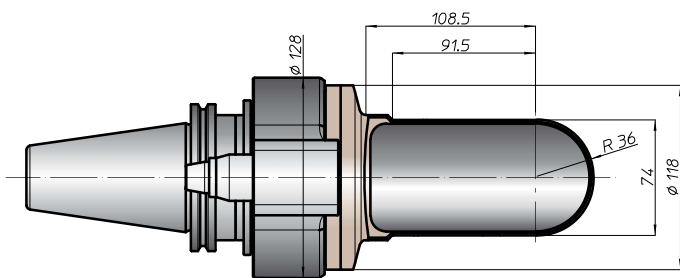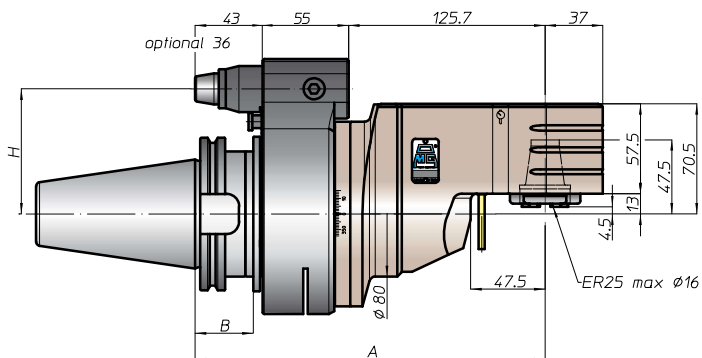

CONO SHANK	size	H			
		A	B	standard	optional
DIN69871 *	-	223,5	35	-	-
	45			80	110
	50			80	110
ANSIB5.50 *	-	223,5	35	65	-
	50			80	110
* BT	-	231,5	45	65	-
	50			80	110
HSK	-	232,5	46	-	-
	80			80	110
	100			80	110
ISO26623	-	227,5	-	-	-
	C8			80	110
KM	-	223,5	-	-	-
	80			80	110
DIN2080	-	199,5	16	-	-
	50			80	110
ANSIB5.18 NMTB	-	199,5	16	-	-
	50			80	110

\* Option: Dual Contact

FH

BAH

TA-CP

TA

MOx

HT

VH

TSI/TSX

T

MT-TC-TC3

Accessori / Accessories

Appendice tecnica / Technical supplement



FH

BAH

TA-CP

TA

MOX

HT

VH

TSI/TSX

T

MT-TC-TC3

Accessori  
AccessoriesAppendice tecnica  
Technical supplement

4-64

testa ad angolo - angle head

## TAO20.P



## caratteristiche/features




## peso/weight



## rotazione/rotation







## prestazioni/performance

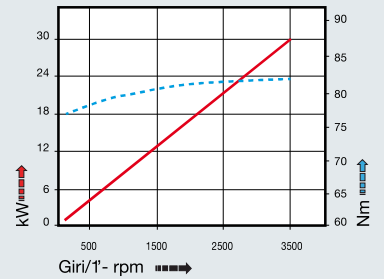

## tipi mandrino disponibili / available spindle types

<b>2</b> Albero portafrese Milling shaft	<b>3</b> Weldon Whistle-Notch	<b>4</b> DIN69893-HSK
<b>Ø22-Ø27-Ø32</b>	<b>Ø16-Ø20</b>	<b>HSK50</b>

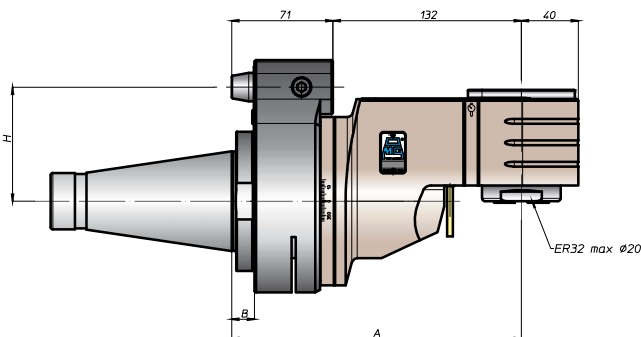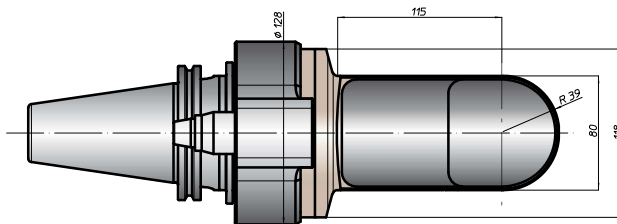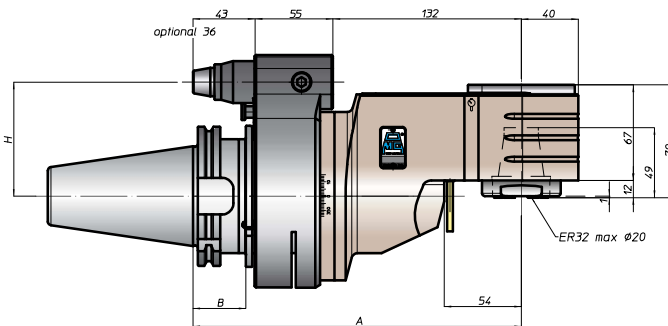

CONO SHANK	size	A	B	H	
				standard	optional
DIN69871 *	-	230	35	-	-
	45			80	110
	50			80	110
ANSIB5.50 *	-	239	46	-	-
	50			80	110
* BT	-	238	45	65	-
	50			80	110
DIN69893	-	234	-	-	-
	80			80	110
	100			80	110
ISO26623	-	234	-	-	-
	C8			80	110
KM	-	230	-	-	-
	80			80	110
DIN2080	-	203	16	-	-
	50			80	110
ANSIB5.18 NMTB	-	203	16	-	-
	50			80	110

\* Option: Dual Contact

FH

BAH

TA-CP

TA

MOX

HT

VH

TSI/TSX

T

MT-TC-TC3

Accessori  
AccessoriesAppendice tecnica  
Technical supplement

4-66

testa ad angolo - angle head

## TAO26.P



## caratteristiche/features




## peso/weight



## rotazione/rotation






## prestazioni/performance

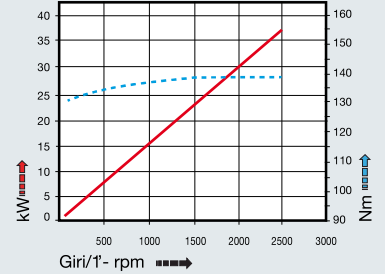

## tipi mandrino disponibili / available spindle types

<b>2</b> Albero portafrese Milling shaft	<b>3</b> Weldon Whistle-Notch	<b>4</b> DIN69893-HSK	<b>5</b> COROMANT CAPTO®	<b>6</b> ABS Licenza KOMET®	<b>7</b> ISO-DIN2079 NMTB-BT
<b>Ø27-Ø32</b>	<b>Ø25-Ø32</b>	<b>HSK63</b>	<b>C4</b>	<b>ABS63</b>	<b>30-40</b>

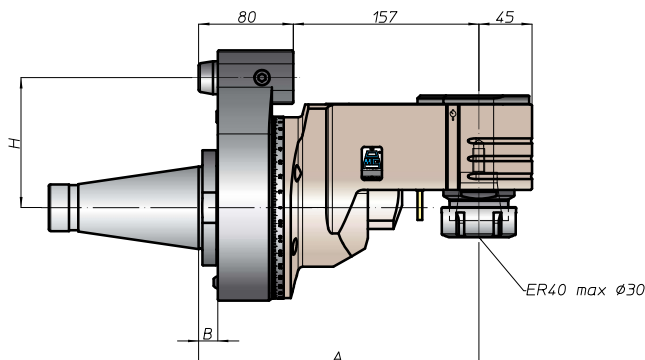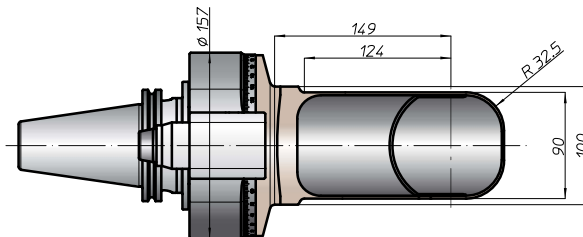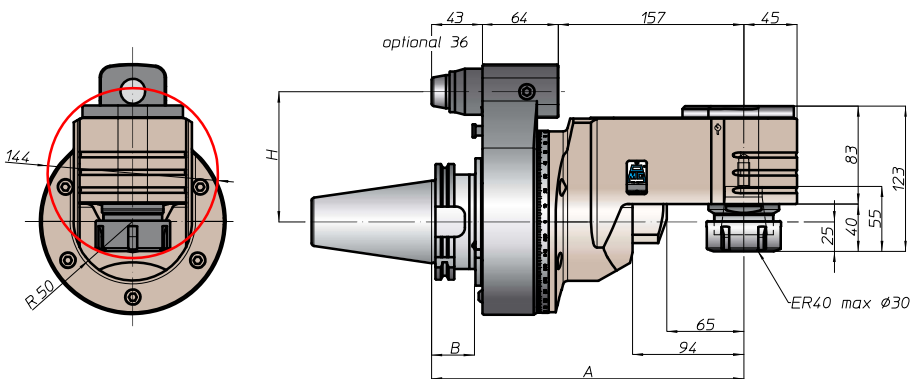

CONO SHANK	size	H		standard	optional
		A	B		
DIN69871 *	-	-	-	-	-
ANSIB5.50 *	50	264	36,5	110	-
BT *	50	272	44,5	110	-
HSK	-	-	-	-	-
DIN69893	100	273	45,5	110	-
CAPTO	-	264	36,5	110	-
ISO26623	C8	-	-	-	-
KM	100	270	-	110	-
DIN2080	50	243	16	110	-
ANSIB5.18 NMTB	50	243	16	110	-

\* Option: Dual Contact